


# Handling, Storage & Cleaning Instructions

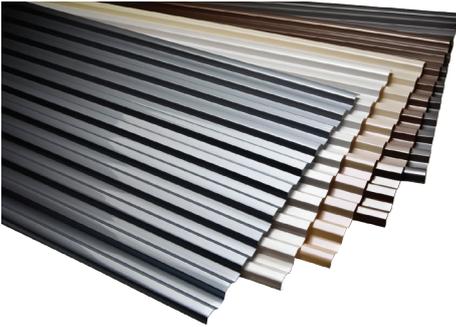

Laserlite® sheeting must be handled, stored and cleaned in accordance with the following instructions:

1. Store sheets on a flat surface in a well protected and shaded area, out of direct sunlight. Stacked sheets stored in the sun will cause heat build-up and possibly distortion, even if covered.
2. Prevent moisture getting between stored sheets as this may cause whitening or discolouration.
3. Avoid contact with chemicals, paints, solvents and sealants (especially silicone) as many of these are incompatible with Polycarbonate.
4. Clean with warm soapy water (mild detergent) and a soft sponge or soft brush. Rinse down thoroughly. Do not remove the sheets to clean once installed. Refer to safety recommendations as outlined in the Laserlite® product brochure.

## Important Sealants

The Laserlite® installation instructions are designed to prevent leaking and alleviate the requirement for sealants. They will damage the sheet and restrict expansion and contraction. Use the strips to complete your project and help protect your outdoor entertaining areas from the weather, without the need for sealants.

## Chemical Properties

Laserlite® is affected by methylated spirits, benzene, petrol, ketones, acetone, phenols, chlorinated and aromatic hydrocarbons, petroleum-based paints, abrasive cleaners and solvents.

The Laserlite® product warranty will not apply to damage as a result of a failure to follow these instructions. Refer to full warranty, terms & conditions available at [laserlite.com.au](http://laserlite.com.au). For further technical assistance please refer to your local Laserlite® distributor, contact details - [laserlite.com.au](http://laserlite.com.au).



• Lifetime Warranty against loss of light transmission. Laserlite® sheeting is now guaranteed not to lose more than 10% of light transmission in the first 15 years, and thereafter no more than 1% per year\* for the commercial life of the product.  
\*When measured in accordance with ASTM D 1003-07e1.  
• 10 year Warranty against Weather Breakage  
In addition, Laserlite® polycarbonate roofing will resist damage from hail measuring up to 25mm for a period of 10 years.