


Laserlite® Accessories for a professional finish



Eave Infill Strips

Prevent rain, dust and wind entering eaves

	LENGTH	COLOUR
Corrugated infill strips	920mm	white or black
Greca infill strips	940mm	white or black
5-Rib infill strips (top & bottom)	750mm	white or black


All infill strips come in packs of 4



Noise Stop Tape

Reduces creaking

	LENGTH	COLOUR
Noise Stop Tape	20m	white





Back Channel and Infill

Prevents leaking at walls and facias

	LENGTH	COLOUR
Back channel (Corrugated and Greca)	3.6m	grey
Back channel (5-Rib)	3.6m	grey
Back channel Infill Strip (Corrugated and Greca)	3.6m	white
Back channel Infill Strip (5-Rib)	3.6m	white


All back channel infills come in packs of 1

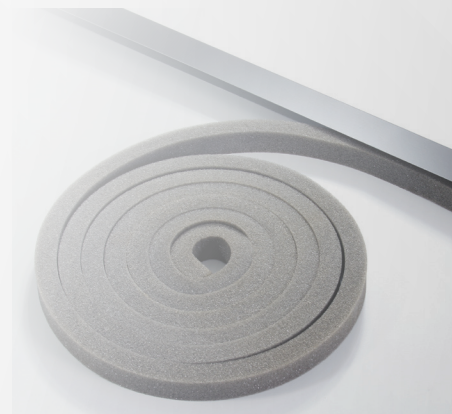


Laserlite® Accessories for a professional finish




One step easy installation




1. Firmly place the sharp point of the One Shot fixing onto the crest of the corrugation to eliminate 'skidding or wandering'.



2. Commence drilling at 1000rpm (timber) 2000rpm (steel) to pierce the sheet. Screw engages in timber or steel batten.




3. Cutter engages polycarbonate sheet, cuts the expansion hole and centers the fixing.



4. Wait until the rubber weather seal engages and compresses against the roof sheet and under the fixing head to stop.

Laserlite® OneShot® Time Saving Fixing System saves 50% installation time as no pre-drilling is required. As a guide, you will need approximately 7 fixings per lineal metre.


Timber OneShot® Fixing




Specifications

- Coated to AS3566 Class 4
- 12 gauge
- 11 threads per inch
- Suitable for use with treated timber
- Type 17 (shape of tip)
- Suitable for use with 5/16" drive
- Cuts 11mm expansion hole
- Suitable for drill speed use -1000rpm

Length available 50mm 65mm




Steel OneShot® Fixing



Specifications

- Coated to AS3566 Class 4
- 12 gauge
- 14 threads per inch
- Suitable for battens .75-4.5mm thick
- Suitable for use with 5/16" drive
- Hex head
- Cuts 11mm expansion hole
- Suitable for drill speed use - 2000rpm

Length available 60mm



Select the quantity that suits your needs

OneShot® 50mm Timber
OneShot® 65mm Timber
OneShot® 60mm Metal

Profile

Corrugated, Greca
5 Rib
Corrugated, Greca, 5 Rib

Pack Size

50 packet | 250 tub | 1000 box
50 packet | 200 tub | 500 box
50 packet | 200 tub | 500 box

For further technical assistance, please refer to your local Laserlite® distributor or visit laserlite.com.au